



P52



P52E

### Highlights

- Injected polypropylene : great resistance to acids and alkalines
- Monoblock injected tank without welding
- Side pannels protecting the pump from splashes
- Large interchangeable range of filtration medias
- Entirely customizable
- Series or parallel filtration
- Tanks in Bypass
- Custom made according to your specifications


### Technical features

Materials	PP
Gaskets	EPDM - FPM
Max temperature	80°C
Filtration rate	0,2 -> 100 µm
Pumps	A27 - A30 - M290 - M390
Flowrate	26 -> 41 m³/h
Connectipon	Threaded, Union nut, grooved nozzle, flanges
Dissolution tank	100L
Options	OILTECH container : PP microfibres, bag filtration: BAGTECH


### Filtration medias



### Flowrate charts

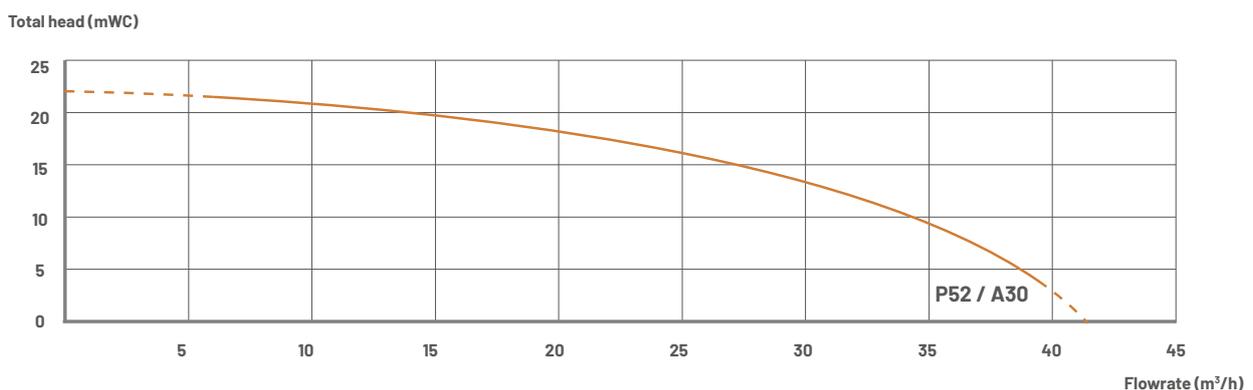


## P52 / P52E dimensions

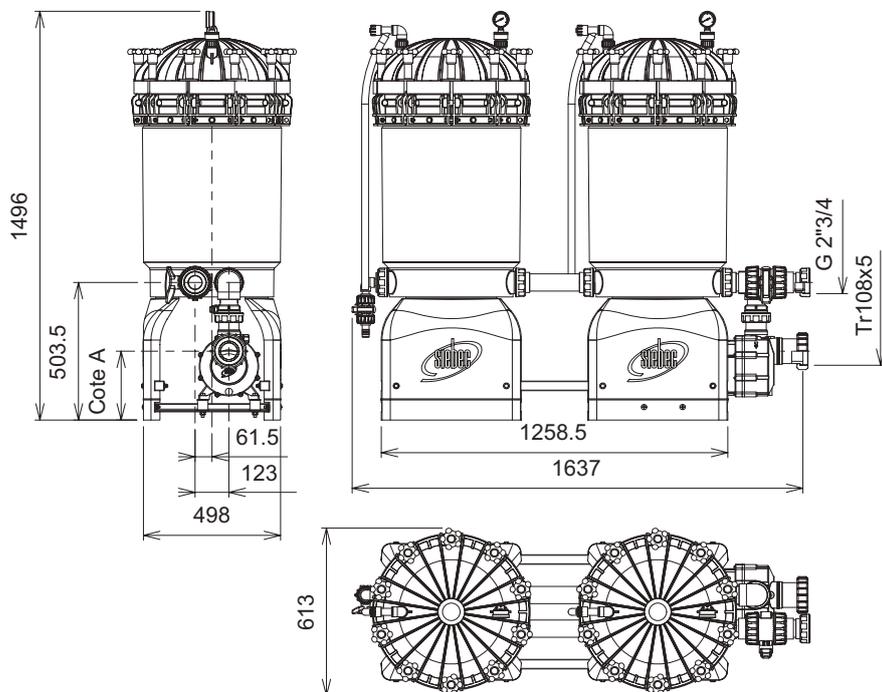

PUMP	A	B
<b>M390</b>	252 mm	Tr108x5
<b>M290</b>	212 mm	G2\"/>
<b>A30</b>	252 mm	Tr108x5
<b>A27</b>	220 mm	Tr108x5

## Dimensions with dissolution tank

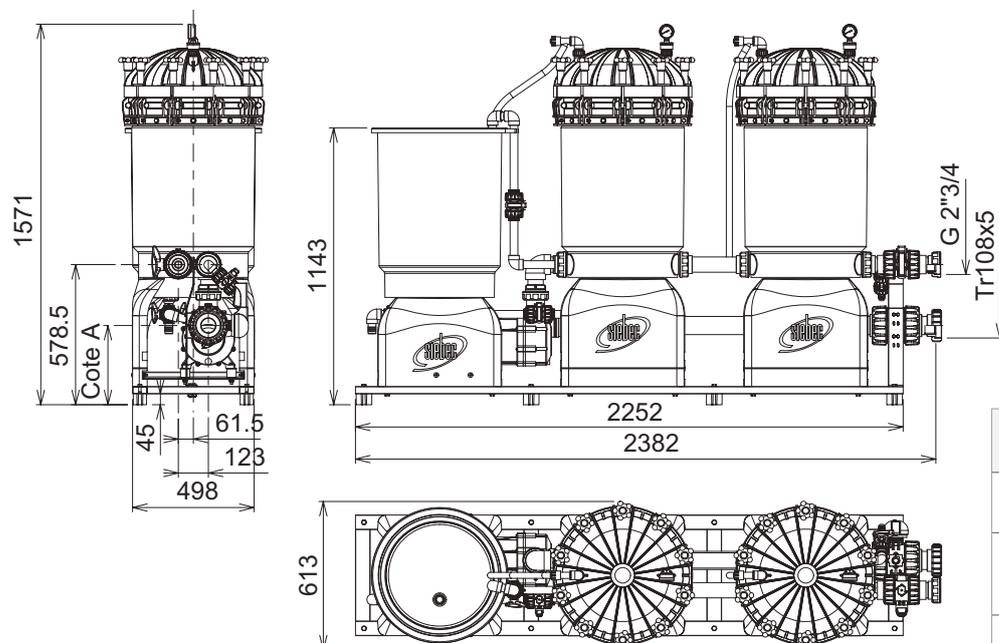

PUMP	A	B
<b>M390</b>	327 mm	Tr108x5
<b>M290</b>	287 mm	G2\"/>
<b>A30</b>	327 mm	Tr108x5
<b>A27</b>	295 mm	Tr108x5

Other specific versions are available on request.

