

Low flow filter



ADVANTAGES

Plexiglas or PP housing.

Small volume filtration on standard cartridges.

SPECIFICATION

Performances

| | |
|-----------------------------------|---------------------|
| Max flow rate (m ³ /h) | 0,35 |
| Max temperatures (°C) | 80 (PP) - 70 (PMMA) |
| Filtration fineness (µm) | 1 -> 50 |


Motor

| | |
|-----------|----|
| Power (W) | 10 |
|-----------|----|

Design



| | |
|---------------------|--|
| Technology | Magnetic drive |
| Available materials | Polypropylene (PP) Plexiglas (PMMA) |
| Pump | M7 |
| Connection | Grooved nozzle |

MC4 / MC10 FLOW RATE CURVE

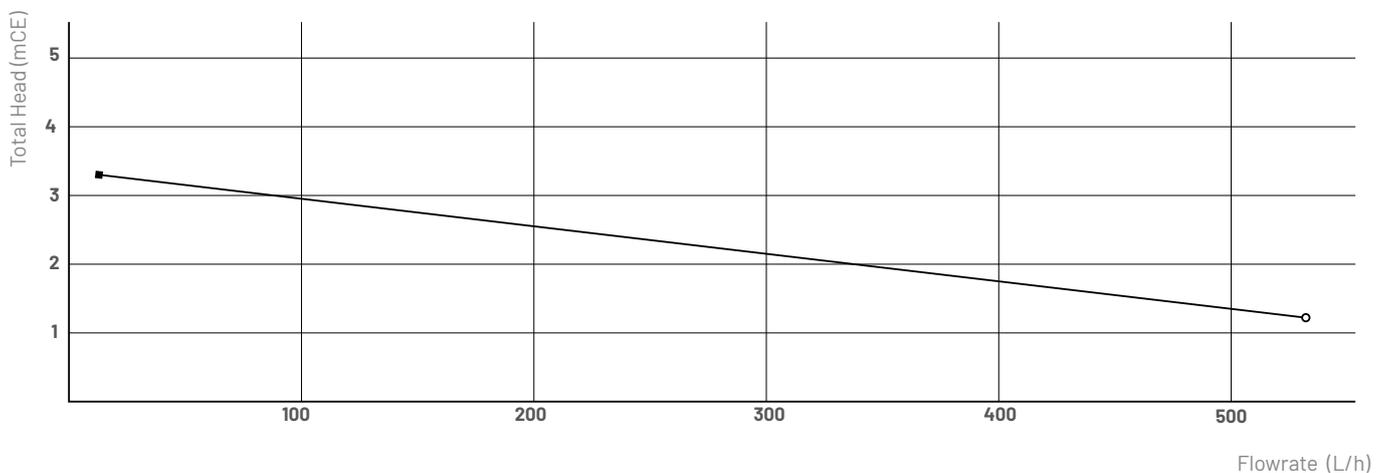

DIMENSIONS

Units : mm

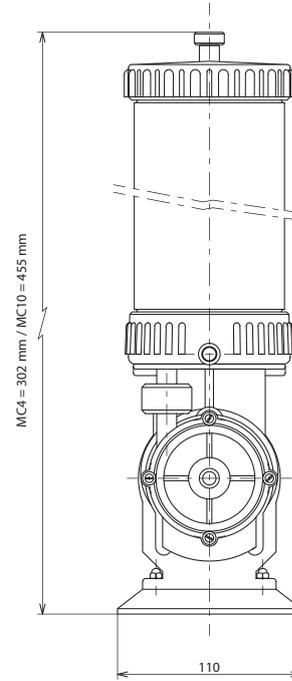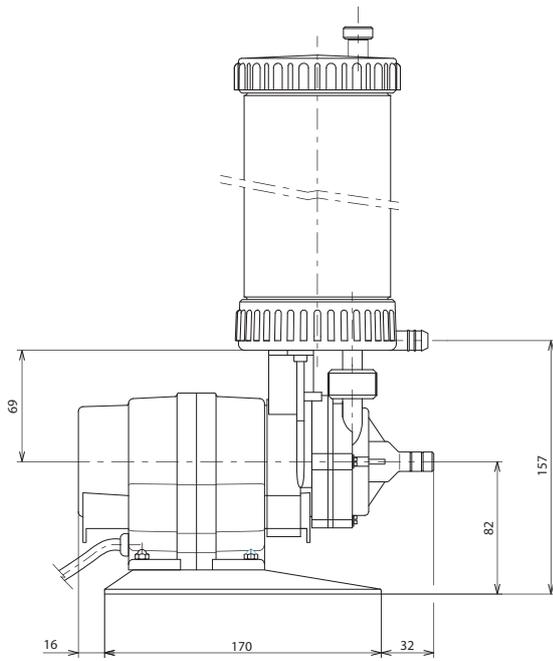

FILTER MEDIA

Standard cartridge :

- MC4 : 1 cartridge 4"
- MC10 : 1 cartridge 10"



SIEBEC SAS
contact@siebec.com



SIEBEC Ltd
sales@siebec.co.uk



SIEBEC S.L.
ventas@siebec.com



SIEBEC SRL
commerciale@siebec.com



SIEBEC GmbH
info@siebec.de



SIEBEC LDA
info.pt@siebec.com

We are here to help.
Contact us!

